




Canadian 0 - 30MHz Band Plan

Effective Date:
December 1, 2015

1. This is a simplified version of the official RAC Band Plan. Not all permissible modes/activities are represented.
2. LSB is used on 160, 80 and 40m.
3. Consult various online resources for detailed information on what digital modes are used.
4. Maximum bandwidth permitted on 2200m is 100 Hz. Maximum power is 1 Watt EIRP.
5. Refer to the IC and RAC websites for full details before operating on the new 60m channels.
6. Remember not to allow your signal to spill over into adjoining band segments when operating close to the edges. During major weekend contests, activity in certain modes can spill over into other segments. Operators should avoid NCDXF beacons on 14.100, 18.110, 21.150, 24.930 and 28.200 MHz.
7. This graphic is a living document and will be reviewed and updated periodically to reflect changes in the band plans and operating habits.

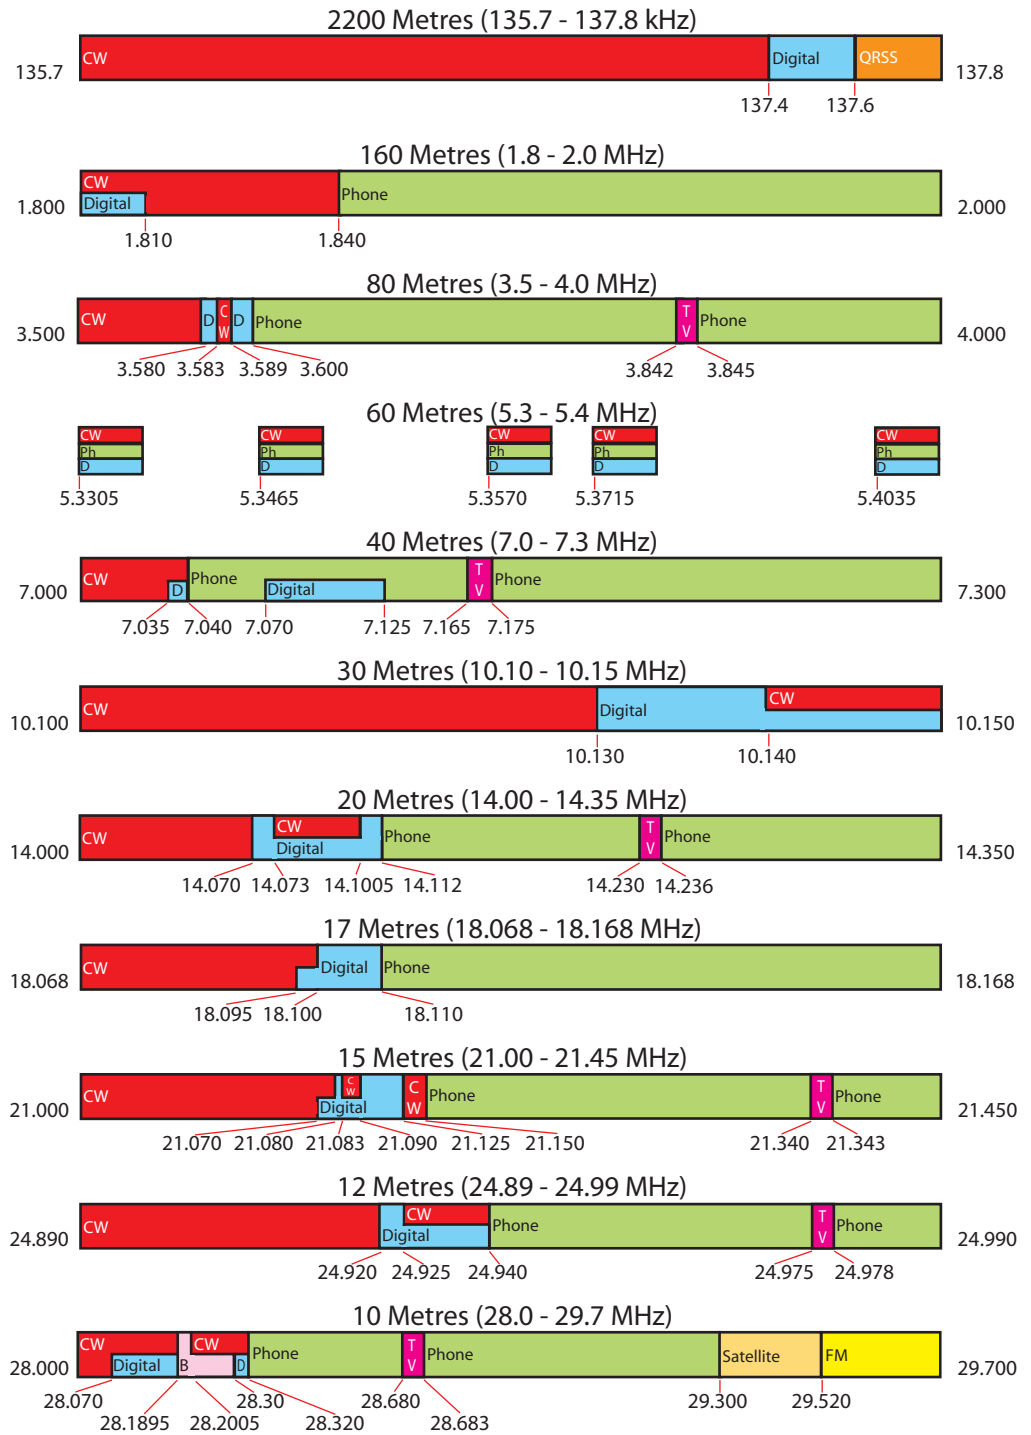

www.rac.ca

| Key | | |
|---------|-----------|---------|
| CW | FM | SSTV |
| CW QRSS | Beacons | Digital |
| Phone | Satellite | |